


# DYNAPAC

## LP6500

### Vibratory Double Drum Pedestrian Roller



#### Technical data

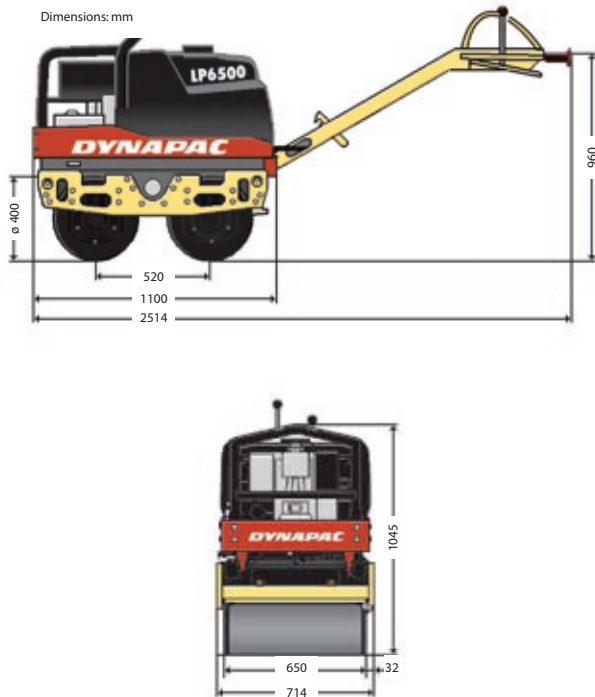


Weight	Electrical start	Manual start
Net weight, kg	678	658
Operating weight CECE, kg	716	696

Engine		
Manufacturer	Hatz	Hatz
Type	1D50S	1D50S
Starting system	Electrical start	Crank
Fuel	Diesel	Diesel
Output kW/rpm	6,8/2600	6,8/2600
Fuel tank capacity, l	5	5
Fuel consumption, l/h	1,35	1,35


Compaction		
Static linear load, kg/cm	5,5	5,35
Speed forward, km/h	0-3,6	0-3,6
Speed reverse, km/h	0-2,3	0-2,3
Gradeability, %	35	35
Drive system	Fully hydraulic	Fully hydraulic
Frequency, Hz/rpm	61/3660	61/3660
Amplitude, mm	0,45	0,45
Centrifugal force, kN	21	21

Sprinkler system		
Tank capacity, l	71	71
Type of sprinkling	Gravity	Gravity

#### Asphalt compaction capacity

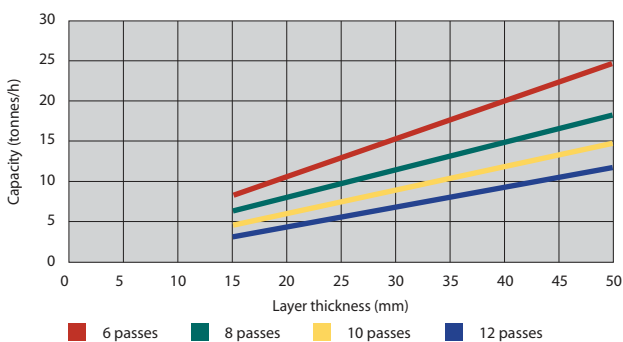

#### Compaction data

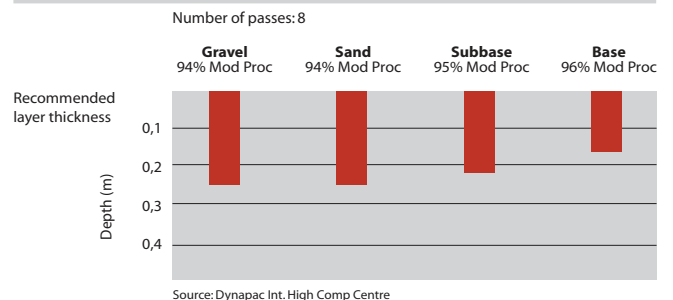

# Walk Behind Double Drum Roller

## The ultimate allrounder



Dynapac LP750

Walk behind rollers are suitable for compacting thin layers on granular soils and asphalt. They are mostly used for small jobs, repair work and compaction in confined areas.

### Oil-cooling system in world class

Controlled oil temperature will increase productivity by offering longer time of operation, longer service intervals and longer lifetime of the machine.



Dynapac LP6500

### Largest water tank on the market

This will significantly increase productivity, and less stops for refill during a work day. The water tank also serves as protection for the hydraulic components.



*Built-in oil cooler to withstand the harshest of environments*

*Most powerful engine of this weightclass*

*Heavy-duty protecting frame*



*Largest water tank on the market for walk-behind rollers.*

*Minimum overhang on both sides due to fully hydraulic design.*

**INMA**

**انما**

DUBAI - H.O. :	4560	285 72 72	285 75 12
ABU DHABI :	798	554 80 80	554 80 82
AL AIN :	15533	721 01 01	721 03 06

E-mail: [inmadxb@eim.ae](mailto:inmadxb@eim.ae)  
[www.inmagulf.ae](http://www.inmagulf.ae)

Dynapac Compaction Equipment AB, Box 504, SE-371 23 Karlskrona, Sweden, Tel: +46 455 30 60 00, Fax: +46 455 30 60 30

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

[www.dynapac.com](http://www.dynapac.com)